

### Audi 4 pin diagnostic interace pinout

used in most 1989-1994 and some 1994-1997 year manufactured Audi cars




Pin Number	Pin Name	Description (may be empty)
1	+12V	Power
2	GND	Ground
3	K-Line	diagnostic k-line
4	L-Line	diagnostic l-line

### Audi OBD-II diagnostic interface pinout

suitable for most Audi models after 1996 (i.e. Audi A3, A4, TT)

**16 pin J1962 OBD-2 car custom connector**

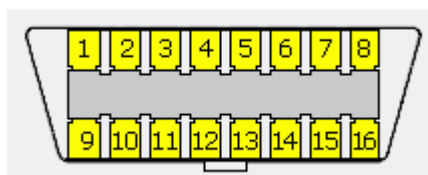

Pin	Signal	Description
2	J1850Bus+	
4	CGND	Chassis ground
5	SGND	Signal ground
6	CAN High	J-2284
7	K-LINE	(ISO 9141-2 and ISO/DIS 14230-4)
10	X1850 BUS-	

14	CAN Low	J-2284
15	ISO 9141-2 L-LINE	(ISO 9141-2 and ISO/DIS 14230-4)
16	+12v	Battery power

ISO 9141 protocol used for 1996-2001 year models.

2002-2004 - ISO9141 or KWP2000

2005-2007 - ISO9141, KWP2000 or CAN

CAN used in 2008 year and later.