


Ford OBD-II diagnostic interface pinout

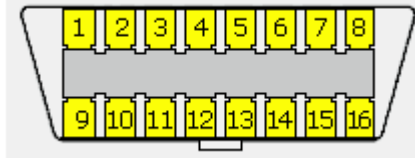

Pin	Signal	Description
2	J1850Bus+	
4	CGND	Chassis ground
5	SGND	Signal ground
6	CAN High	J-2284
7	K-LINE	(ISO 9141-2 and ISO/DIS 14230-4)
10	J1850Bus-	
14	CAN Low	J-2284
15	ISO 9141-2 INLINE	(ISO 9141-2 and ISO/DIS 14230-4)
16	+12v	Battery power

Interfaces used:

1996 - 2001 : J1850-PWM only

2002 - 2006 : J1850-PWM or CAN

after 2006 : CAN